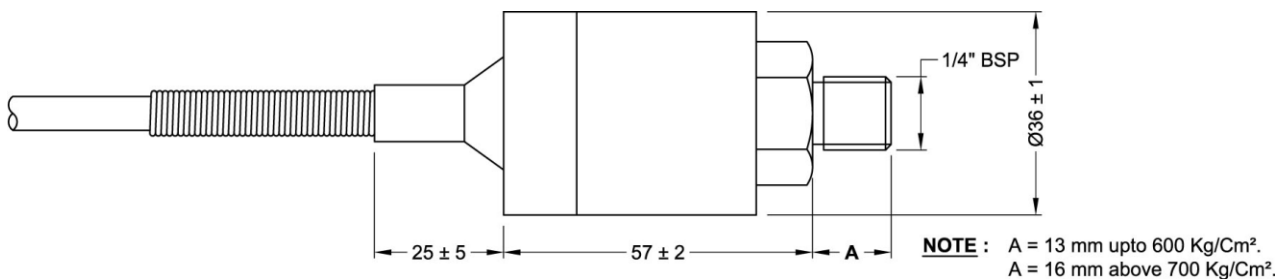


**FEATURES :**

- \* *High Accuracy*
- \* *Robust Design*
- \* *Easy to Install*
- \* *Temperature Compensated*
- \* *Good Reliability*
- \* *Wide Range*

**SPECIFICATIONS :**

Rated Capacity	10, 20, 30, 50, 75, 100, 150, 200, 300, 500, 600, 750, 1000, 1500, 2000 Bar		
Excitation Voltage	10 - 12 VDC	Insulation Resistance (50 V DC)	1000 M Ohms
Nominal Output	1 mV/V up to 10 Bar	Measurement Fluid	Any Fluid compatible with Stainless Steel
	2 mV/V above 20 Bar		
Non - Linearity	$\pm 0.50$ % FSO	Safe Overload	150 %
Hysteresis	$\pm 0.50$ % FSO	Temp. Compensated Range	0 - 55 °C
Non-Repeatability	$\pm 0.10$ % FSO	Temperature Effect on Output	$\pm 5\%$ /100°C
Bridge Resistance	350 $\pm$ 25 Ohms	Temperature Effect on Zero	$\pm 5\%$ /100°C

**DIMENSIONS :**

**Office** : F # 1, Paradise Apartments, No. 11, 1<sup>st</sup> Floor, 5<sup>th</sup> Cross, Prashanthnagar, Bangalore - 560 079.  
Ph : 080 - 2348 1364, 6576 1259. Fax : 080 - 2328 3728. E-mail : sales@epochloadcell.com.

**Factory** : No. 16, Bhadrappa Estate, 54, Magadi Main Road, Kamakshipalya, Bangalore - 560 079.  
Ph : 080 - 2328 7998. E-mail : epochinstruments@yahoo.com, Web : www.epochloadcell.com.