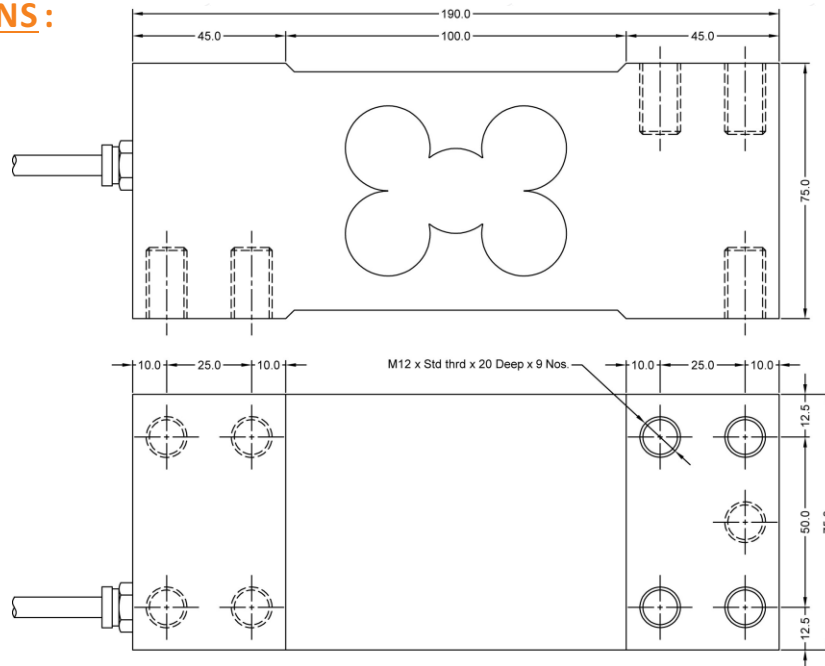


**FEATURES :**

- \* Low Profile.
- \* Minimum Error for Off-Centre loading.
- \* Supports the Pan size of 900 x 900 (mm).

**SPECIFICATIONS :**

Rated Capacity	500, 750, 1000, 1500, 2000, 3000 Kg.		
Excitation Voltage	10 - 12 VDC	Insulation Resistance (50 V DC)	1000 M Ohms
Nominal Output	2.0 mV/V $\pm$ 0.50 %	Cable Length	3 Meters
Non - Linearity	$\pm$ 0.025 % FSO	Safe Overload	150 %
Hysteresis	$\pm$ 0.025 % FSO	Ultimate Overload	200 %
Non-Repeatability	$\pm$ 0.05 % FSO	Temp. Compensated Range	0 - 60 °C
Creep (30 minutes)	$\pm$ 0.05 % FSO	Temperature Effect on Output	0.005% FSO/°C
Zero Balance	$\pm$ 2.0 % FSO	Temperature Effect on Zero	0.005% FSO/°C
Input Resistance	400 $\pm$ 25 Ohms	Deflection	0.5 mm at FSO
Output Resistance	350 $\pm$ 5 Ohms	Protection Class	IP65

**DIMENSIONS :**

**Office** : F # 1, Paradise Apartments, No. 11, 1<sup>st</sup> Floor, 5<sup>th</sup> Cross, Prashanthnagar, Bangalore - 560 079.  
Ph : 080 - 2348 1364, 6576 1259. Fax : 080 - 2328 3728. E-mail : sales@epochloadcell.com.

**Factory** : No. 16, Bhadrappa Estate, 54, Magadi Main Road, Kamakshipalya, Bangalore - 560 079.  
Ph : 080 - 2328 7998. E-mail : epochinstruments@yahoo.com, Web : www.epochloadcell.com.