


FEATURES :

- * High Accuracy
- * Good Repeatability
- * Easy to Install
- * Robust Body
- * Good Reliability
- * Wide Range


SPECIFICATIONS :

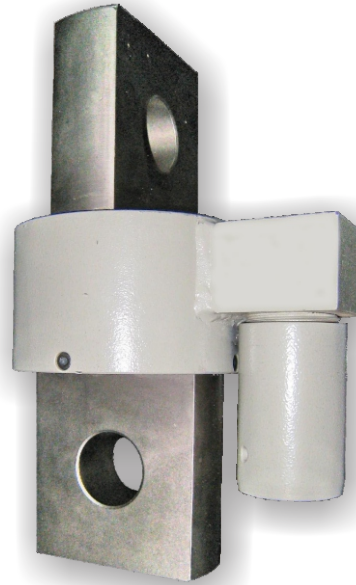

Rated Capacity	2, 3, 5, 10, 15, 20, 25, 30, 40, 50, 60, 75, 100 Tonne.		
Excitation Voltage	10 - 12 VDC	Insulation Resistance (50 V DC)	1000 M Ohms
Nominal Output	1 mV/V $\pm$ 0.25 %	Zero Balance	$\pm$ 2.0 % FSO
Non - Linearity	$\pm$ 0.10 % FSO	Safe Overload	150 %
Hysteresis	$\pm$ 0.10 % FSO	Ultimate Overload	200 %
Non-Repeatability	$\pm$ 0.05 % FSO	Temp. Compensated Range	0 - 55 °C
Creep (30 minutes)	$\pm$ 0.03 % FSO	Temperature Effect on Output	0.005% FSO/°C
Input Resistance	350 $\pm$ 10 Ohms	Temperature Effect on Zero	0.005% FSO/°C
Output Resistance	350 $\pm$ 5 Ohms	Protection Class	IP-66

DIMENSIONS :

CAPACITY	A	ØB	ØC	D	E	F	G	ØH
2, 3, 5 Tonne	210.0	Ø75.0	Ø65.0	65.0	80.0	32.5	28.0	Ø35.0
10, 15 Tonne	280.0	Ø75.0	Ø65.0	100.0	80.0	50.0	30.0	Ø40.0
20, 25 Tonne	320.0	Ø97.0	Ø85.0	120.0	80.0	60.0	50.0	Ø55.0
30, 40 Tonne	360.0	Ø122.0	Ø110.0	140.0	80.0	70.0	60.0	Ø66.0
50, 60 Tonne	400.0	Ø166.0	Ø150.0	155.0	90.0	77.5	75.0	Ø75.0
75, 100 Tonne	410.0	Ø176.0	Ø160.0	160.0	90.0	80.0	80.0	Ø80.0

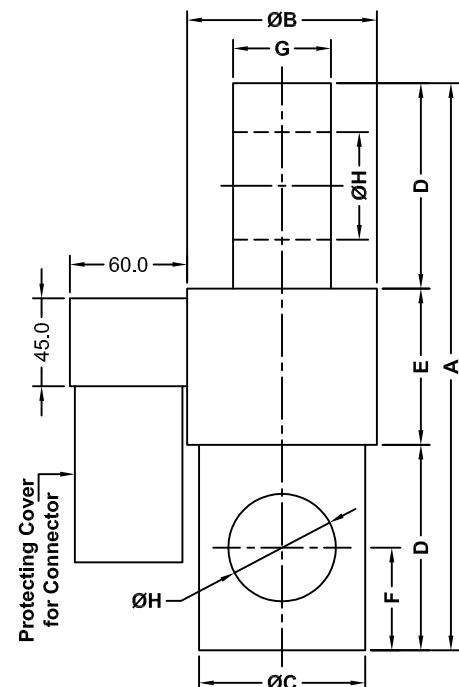

Office : F # 1, Paradise Apartments, No. 11, 1st Floor, 5th Cross, Prashanthnagar, Bangalore - 560 079.
Ph : 080 - 2348 1364, 6576 1259. Fax : 080 - 2328 3728. E-mail : sales@epochloadcell.com.

Factory : No. 16, Bhadrappa Estate, 54, Magadi Main Road, Kamakshipalya, Bangalore - 560 079.
Ph : 080 - 2328 7998. E-mail : epochinstruments@yahoo.com, Web : www.epochloadcell.com.