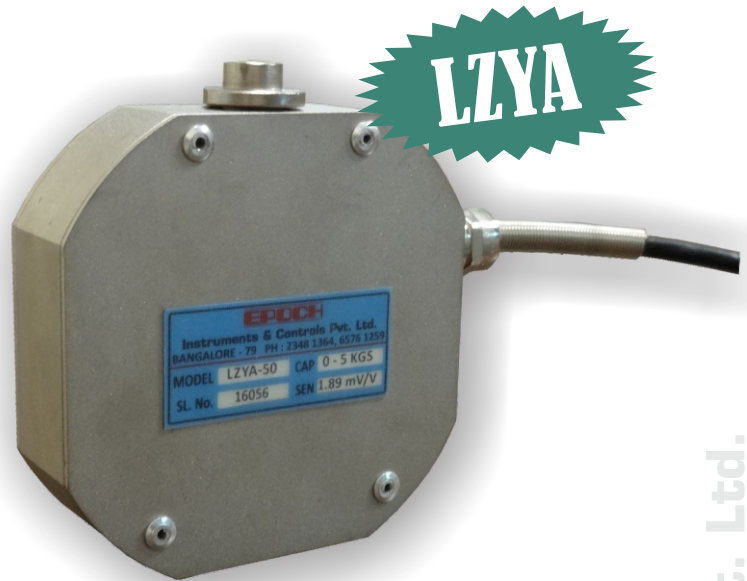
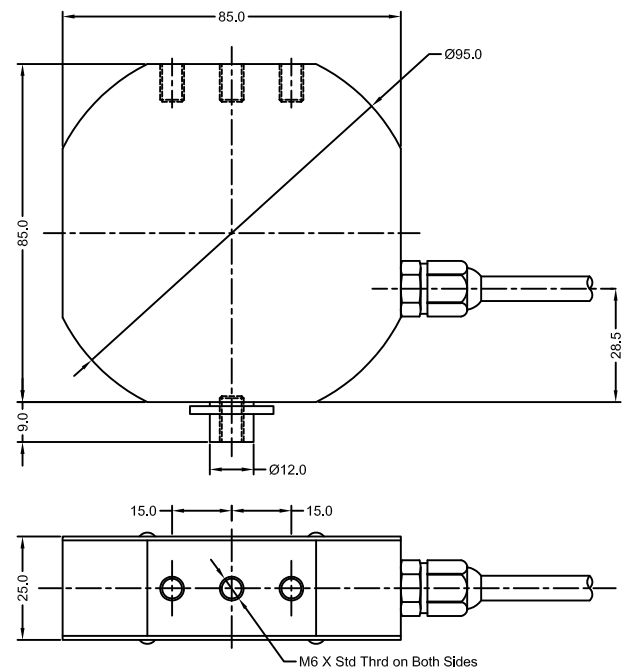


FEATURES :

- * *Good Linearity*
- * *Good Repeatability*
- * *Easy to Install*
- * *Temperature Compensated*
- * *Good Reliability*
- * *Wide Range*
- * *Overload Protection*

**SPECIFICATIONS :**

Rated Capacity	: 5, 10, 20, 30 Kgs.
Excitation Voltage	: 10 - 12 V DC.
Nominal Output	: 2 mV/V $\pm$ 0.25 %.
Non Linearity	: $\pm$ 0.025% FSO.
Hysteresis	: $\pm$ 0.025% FSO.
Non-Repeatability	: $\pm$ 0.050% FSO..
Creep (30 minutes)	: $\pm$ 0.030% FSO.
Zero Balance	: $\pm$ 2.0% FSO.
Input Resistance	: 400 $\pm$ 25 Ohms.
Output Resistance	: 350 $\pm$ 5 Ohms.
Insulation Resistance	: 1000 M Ohms.
Temp. Comp. Range	: 0°C to 60°C.
Temp. Effect on Output	: 0.005% FSO/°C.
Temp. Effect on Zero	: 0.005% FSO/°C.
Safe Overload	: 150% FSO.
Ultimate Overload	: 200% FSO.

DIMENSIONS :

Office : F # 1, Paradise Apartments, No. 11, 1st Floor, 5th Cross, Prashanthnagar, Bangalore - 560 079.
Ph : 080 - 2348 1364, 6576 1259. Fax : 080 - 2328 3728. E-mail : sales@epochloadcell.com.

Factory : No. 16, Bhadrappa Estate, 54, Magadi Main Road, Kamakshipalya, Bangalore - 560 079.
Ph : 080 - 2328 7998. E-mail : epochinstruments@yahoo.com, Web : www.epochloadcell.com.